



UR300QVAC AND UR800QVAC THE MOBILE VACUUMS

KEEP YOUR SHOP DUST FREE WHILE SANDING



ON / OFF control at the sander automatically turns the powerful vacuum on and off for collection of dust and debris. Sanders store neatly on the "Y" posts. Posts can be placed on the steel peg board to neatly store disc sandpaper.



UR300QVAC




UR800QVAC

BENEFITS


ASSISTS SHOPS IN MEETING AIR QUALITY STANDARDS

- Cleaner and healthier shop environment
- Technicians breathe freely, reduces need for breathing apparatus.
- Recently painted parts are dust free.
- Reduces clean up time.
- Reduces sand paper consumption.
- Complements or even eliminates need for central vacuuming system.

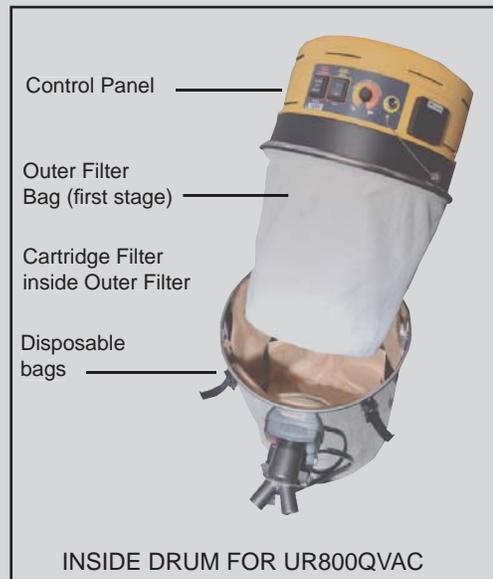

UR300QVAC

- One-person system with 16 ft hose and 20 ft power cord.
- Control Panel (see photo)
 - Auto - Sander automatically turns vacuum on and off.
 - Manual - User manually turns vacuum on and off.
- Outlet for electric sander.
- Motor: 1 motor at 800 W. Maximum decibel rating is 60 db. The motor is a 2 stage, bypass motor with a diecast housing and an internal fan for cooling.
- Replaceable motor brushes.
- Waste collects between outer filter and drum wall. Remove outer filter to reveal waste for removal. Drum capacity is 24 L.
- Voltage:
 - 120 V, 50/ 60 Hz. for UR300QVAC
 - 240 V, 50/ 60 HZ. for UR300QVACH
- Stainless steel drum construction.
- Vacuum Pressure: 2200 mm H₂O
- CE Safety Approval, 1 year warranty.
- Dimensions 45" h x 15" w x 30" d

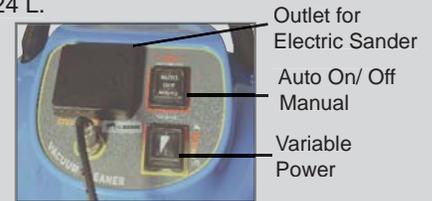

CONTROL PANEL FOR UR300QVAC

UR800QVAC

- Two person system - with two 16 ft hoses and 20 ft power cord.
- Control Panel (see photo)
 - Auto - Sander automatically turns vacuum on and off.
 - Manual - User manually turns vacuum on and off.
- Outlet for electric sander.
- Variable power settings.
- Motor: Select single or dual vacuum motors, single = 1,000 W and dual =2,000 W. Maximum decibel rating at 2,000 W is 70 db. The motor is a 2 stage, bypass motor with a diecast housing and an internal fan for cooling.
- Replaceable motor brushes.
- Voltage: 120 V 50 / 60 Hz. for UR700QVAC
240 V 50 / 60 Hz for UR700QVACH
- Stainless steel drum construction (12 Gal, 47 L) capacity.
- Can be used as a wet vac with optional kit - part number 28-710.
- Vacuum Pressure: 99 inH₂O, 2,700 mm
- CE safety approval, 1 year warranty.
- Dimensions 41" h x 31" w x 21" d • Weight 66 lb / 30 kg

OPTIONAL PARTS

- Cartridge Filter, High Density, HEPA like 28-172
 - 24 ft. vacuum and air hose 28-724
 - Vacuum hose and floor brush kit, with dust brush and crevice tool 28-710
 - **SANDERS**
 - UPSANDER 6" Pad, 5 mm offset, 1.7 lb, 90 PSI, 8.4 cfm
 - UPFSANDER 6" Pad, Fine, 2.5 mm offset, 1.7 lb, 90 PSI, 8.4 cfm
- Note: Sanders are sold separately. (not included with VACs)